

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number  
**WO 2004/036618 A1**

(51) International Patent Classification<sup>7</sup>: **H01J 61/96**,  
H05B 35/00, H01J 61/72, 61/44

(21) International Application Number:  
PCT/IB2003/004415

(22) International Filing Date: 8 October 2003 (08.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
102 47 833.3 14 October 2002 (14.10.2002) DE

(71) Applicant (for DE only): **PHILIPS INTELLECTUAL  
PROPERTY & STANDARDS GMBH** [DE/DE]; Stein-  
damm 94, 20099 Hamburg (DE).

(71) Applicant (for all designated States except DE, US):  
**KONINKLIJKE PHILIPS ELECTRONICS N.V.**  
[NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven  
(NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JÜSTEL, Thomas**

[DE/DE]; c/o Philips Intellectual Property & Stan-  
dards GmbH, Weissshausstr. 2, 52066 Aachen (DE).  
**BERTRAM, Dietrich** [DE/DE]; c/o Philips Intellectual  
Property & Standards GmbH, Weissshausstr. 2, 52066  
Aachen (DE). **SCHMIDT, Peter** [DE/DE]; c/o Philips  
Intellectual Property & Standards GmbH, Weissshausstr. 2,  
52066 Aachen (DE).


(74) Agent: **MEYER, Michael**; Philips Intellectual Property &  
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: **LUMINOUS BODY FOR GENERATING WHITE LIGHT**

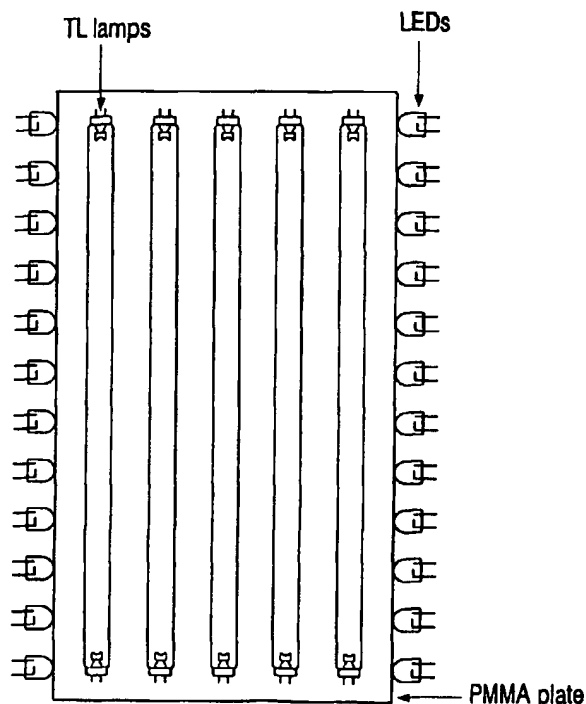

(57) Abstract: A luminous body for generating white light is described which is provided with a combination of a light-emitting diode radiating blue light and a fluorescent lamp comprising green and red phosphors.

EV 726254165 US

WO 2004/036618 A1



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

## Luminous body for generating white light

The invention relates to a luminous body for generating white light having the particular features of an enhanced useful life and a greater color point stability.

It is known that a three-color phosphor mixture is used in high-quality fluorescent lamps for the generation of white light. The color point of the lamp is then  
5 determined by the mixing ratio of the phosphors.

The blue phosphors used at present represent a particular problem here for maintaining the color point because of the sensitivity of the activator  $\text{Eu}^{2+}$ . As a result, fluorescent lamps exhibit an undesirable shift in their color point during lamp operation, which is particularly unpleasant in the case of compact fluorescent lamps (energy-saving  
10 lamps).

Fluorescent lamps are known from Japanese patent application JP-10275600 A whose light spectrum can be modified by a light-emitting diode. The light-emitting diode,  
15 however, is integrated in the burner in this case, so that it comes into contact with the discharge. A gas discharge is a highly aggressive medium which would quickly destroy the light-emitting diode. In addition, the complete omission of the blue phosphor, which has always been used until now, is not proposed therein.

20

It is accordingly an object to develop luminous bodies which are remarkable for a long useful life and an improved color point stability.

This object is achieved by means of a luminous body which, for the purpose of generating white light, is provided with a combination of light-emitting diodes generating  
25 blue light (380-500 nm) and one or several fluorescent lamps comprising green and red phosphors. The fluorescent lamps emit a yellowish-white light with a color temperature of between 2500 and 3000 K owing to the absence of the blue emission.

The light-emitting diodes providing blue light may be arranged in the luminous body according to the invention in various manners, as long as a good light mixing

and a homogeneous light are achieved thereby. However, they cannot be directly integrated into the burner of a fluorescent lamp, since the contact with the discharge would considerably reduce their useful lives.

Since the useful life of the blue light-emitting diode is much longer than that of conventional gas discharge sources, the useful life and the color point stability of the luminous body are considerably enhanced by the invention.

The short life of conventional luminous bodies is mainly due to the blue light-emitting phosphors containing  $\text{Eu}^{2+}$  such as  $\text{BaMgAl}_{10}\text{O}_{17}:\text{Eu}$  and  $\text{Sr}_5(\text{PO}_4)_3(\text{F},\text{Cl}):\text{Eu}$ . These phosphors have a comparatively fast depreciation and have given rise to numerous experiments aimed at improving the quality of the phosphors so as to avoid their fast depreciation. Alternative phosphors for replacing these blue light-emitting substances, however, have not been found until now.

The emission of blue light is a decisive element in a luminous body radiating white light, in particular at high color temperatures. Since the phosphor radiating blue light forms the weak spot of all fluorescent lamps (TL, PL and CFL) used at present, the solution according to the invention considerably reduces this problem of lamp life for these lamps, which is of essential importance for the economy of such lamps.

The luminous body according to the invention is preferably formed by a combination of a conventional fluorescent lamp provided with red and green phosphors and an  $\text{InGaN}$  or  $\text{AlInGaV}$  light-emitting diode providing blue light in a wavelength range of between 380 and 500 nm. The two light sources, i.e. the fluorescent lamp(s) and the blue light-emitting diodes, are accommodated in a single lamp housing or in the same luminaire.

The invention will be clarified with reference to the drawing comprising Figs. 10, 1 to 6, in which

Fig. 10 shows a lamp according to the invention with light-emitting diodes providing blue light,

Fig. 1 shows a rectangular light tile with light-emitting diodes providing blue light and with fluorescent tubular lamps,

Fig. 2 shows a round light tile with light-emitting diodes providing blue light and a circular tubular fluorescent lamp,

Fig. 3 shows the emission spectrum of a fluorescent lamp with  $\text{LaMgAl}_{11}\text{O}_{19}:\text{CeTb}$  and  $\text{Y}_2\text{O}_3:\text{Eu}$ ,

Fig. 4 shows the emission spectrum of a light-emitting diode that radiates blue light,

Fig. 5 shows the color points of a light-emitting diode that radiates blue light, a fluorescent lamp, and the light source formed by the former two at 5000 K CCT, and

Fig. 6 shows the emission spectrum of a luminous body combining light-emitting diodes radiating blue light and fluorescent lamps provided with  $\text{LaMgAl}_{11}\text{O}_{19}:\text{CeTb}$  and  $\text{Y}_2\text{O}_3:\text{Eu}$ , at 5000 K CCT.

Fig. 10 shows a luminous body according to the invention with the light-emitting diodes 1 radiating blue light, the fluorescent lamp 2, and the outer lamp bulb which is coated with a light-scattering layer. It is possible here, for example, for three InGaN light-emitting diodes radiating blue light with an emission maximum of 480 nm to be accommodated inside the outer lamp bulb 3. The fluorescent lamp is coated with  $\text{LaMgAl}_{11}\text{O}_{19}:\text{CeTb}$  (green) and  $\text{Y}_2\text{O}_3:\text{Eu}$  (red), such that a yellowish-white light is generated if the fluorescent lamp is operated alone. The current supply to the light-emitting diodes is integrated into the base of the luminous body. When the light-emitting diodes are switched on together with the fluorescent lamp, the light will be mixed inside the lamp bulb and the overall radiated light will appear white, which corresponds to a color temperature  $T_c = 5000$  K. An increase in the current through the light-emitting diodes leads to an increased radiation of blue light, which causes the color temperature of the overall radiated light to rise; a reduction in the current reduces the quantity of blue light and accordingly lowers the color temperature of the emitted light.

The color rendering index achieved in this manner lies above 80 for all color temperatures between 2600 and 10,000 K.

The luminous bodies according to the invention as shown in Figs. 1 and 2 have planar or circular shapes which are covered with PMMA plates. The fluorescent lamps comprise a green phosphor, for example  $\text{LaPO}_4:\text{CeTb}$ ,  $\text{LaMgAl}_{11}\text{O}_{19}:\text{CeTb}$ , or  $\text{GdMgB}_5\text{O}_{10}:\text{CeTb}$ , and, for example,  $\text{Y}_2\text{O}_3:\text{Eu}$  or  $\text{Y}(\text{V,P})\text{O}_4:\text{Eu}$  as the red phosphor.

Fig. 3 shows the emission spectrum of such a fluorescent lamp. The color points of these fluorescent lamps ( $x = 0.47$ ,  $y = 0.42$ ) lie close to the color point of  $\text{YAGaG}:\text{Ce}$  ( $x = 0.48$ ,  $y = 0.50$ ) used in light-emitting diodes that radiate white light (see Fig. 5).

An increase in the current strength renders it possible to raise the color temperature of the blue light-emitting diodes up to 10,000 K, with the result that the color point lies close to the blackbody locus for this color temperature, provided the blue light-emitting diode was correctly chosen. Most suitable are blue light-emitting diodes with a color point at  $x = 0.1$  and  $y = 0.2$ .

The advantages of the luminous body according to the invention lie in an improved luminous efficacy and a higher color point stability, because the useful life of the light-emitting diode is much longer than the useful life of a conventional blue phosphor as used until now in fluorescent lamps.

In addition, the light color can be modified more easily in the luminous body according to the invention in that simply the radiation of the blue light of the light-emitting diode is varied through an increase or decrease in the current strength. It is necessary for this that a separate current supply is provided for the light-emitting diode, so that the current flow to the light-emitting diode, and thus its light emission, can be controlled independently of the light emission of the fluorescent lamp. This renders it possible to adjust the color temperature of the blue light-emitting diode over a wide range, for example between 2660 K and 10,000 K.

The combination of two light sources which should appear to be only a single one necessitates certain optical means for mixing the light in a suitable manner. In their absence the light combination would be visible and the radiated light would appear to be inhomogeneous. It is accordingly necessary to integrate the light-emitting diodes into the lamp such that a good light distribution and mixing are safeguarded.

This may be readily achieved in GLS-look-alike CFL-I lamps because an outer thermoplastic bulb has already been developed for these, which bulb scatters the light by means of a powder layer. The blue light-emitting diodes then merely have to be accommodated inside the outer bulb of the CFL-I lamp, while the necessary electronic control means can be accommodated in the lamp base. Alternative constructions for implementing the present invention are also conceivable, for example accommodating the blue light-emitting diode inside the same lamp housing, or alternatively in a lamp housing separate from the fluorescent lamp. The light-emitting diode may also be used in conjunction with a PMMA plastic foil or plastic plate which is covered with a light-scattering layer at one side and with a structure for coupling out the light on the other side.

A compact fluorescent lamp, a Hg low-pressure gas discharge lamp, a Hg high-pressure gas discharge lamp, or a sulphur lamp may be used as the fluorescent lamp in

the luminous body according to the invention. The useful life and the color point stability of the luminous body are considerably improved in the generation of white light in all cases.

LIST OF REFERENCE NUMERALS

- |     |  |
|-----|--|
| 1   | light-emitting diodes radiating blue light |
| 2   | fluorescent lamp                           |
| 5 3 | outer lamp bulb                            |



## CLAIMS:

1. A luminous body for generating white light, characterized in that it is provided with a combination of light-emitting diodes radiating blue light and a fluorescent lamp comprising green and red phosphors.
- 5 2. A luminous body as claimed in claim 1, characterized in that the light-emitting diode radiating blue light comprises a semiconductor based on InGaN or AlInGaN.
3. A luminous body as claimed in claims 1 and 2, characterized in that the blue  
10 light radiated by the light-emitting diode lies in a wavelength range of between 380 and 500 nm.
4. A luminous body as claimed in claims 1 to 3, characterized in that the  
fluorescent lamp is a compact fluorescent lamp (energy-saving lamp), a Hg low-pressure gas  
discharge lamp (fluorescent tube), a Hg high-pressure gas discharge lamp, or a sulphur lamp.  
15
5. A luminous body as claimed in claims 1 to 4, characterized in that the  
fluorescent lamp comprises at least one phosphor from the group of  $\text{LaPO}_4\text{:CeTb}$ ,  
 $\text{LaMgAl}_{11}\text{O}_{19}\text{:CeTb}$ ,  $\text{GdMgB}_5\text{O}_{10}\text{:CeTb}$ ,  $\text{Y}_2\text{O}_3\text{:Eu}$ ,  $\text{Y(V,P)O}_4\text{:Eu}$ , or one of the mixtures  
thereof.  
20
6. A luminous body as claimed in claims 1 to 5, characterized in that the light-  
emitting diode radiating blue light is accommodated inside the same lamp housing as the  
fluorescent lamp.
- 25 7. A luminous body as claimed in claims 1 to 8, characterized in that the light-  
emitting diode radiating blue light is accommodated in a lamp housing separate from the  
fluorescent lamp.

8. A luminous body as claimed in claims 1 to 7, characterized in that a separate current supply is provided for the light-emitting diode radiating blue light, such that the current flow to the light-emitting diode and thus its light emission can be controlled independently of the light emission of the fluorescent lamp.

1/4

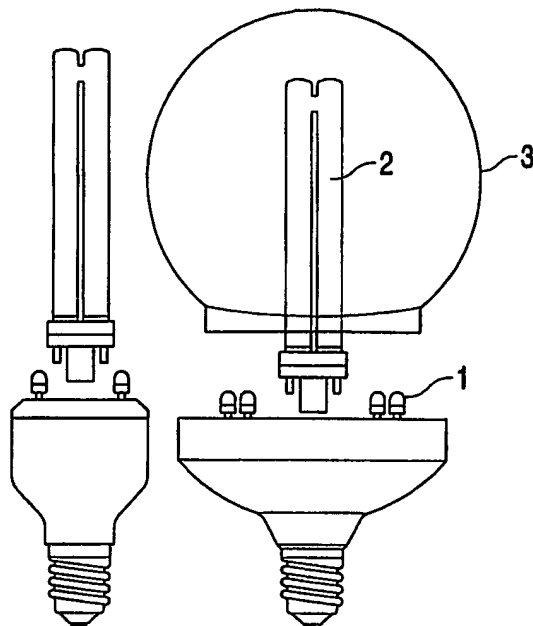


FIG. 10

2/4

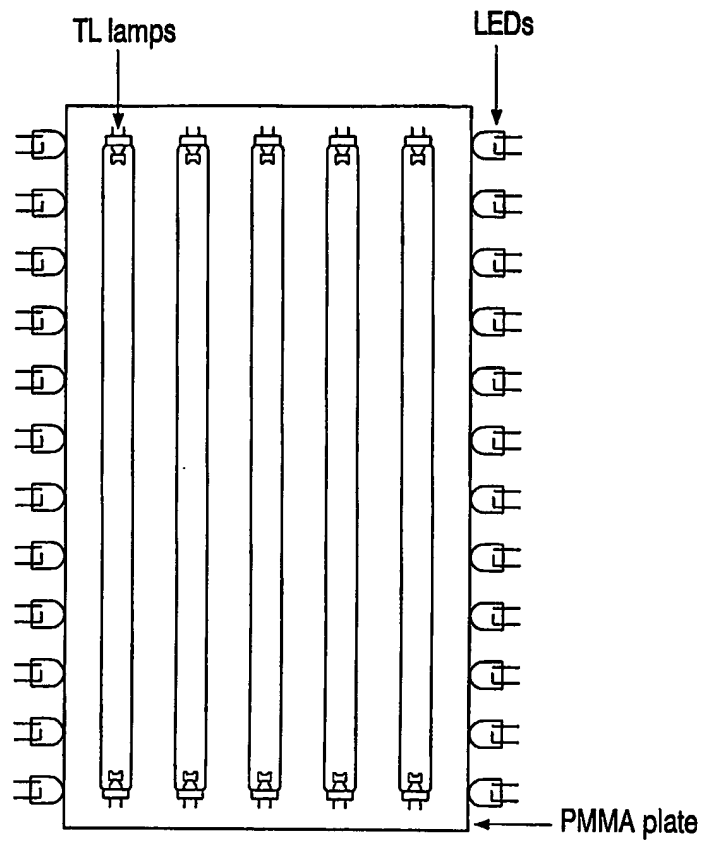


FIG. 1

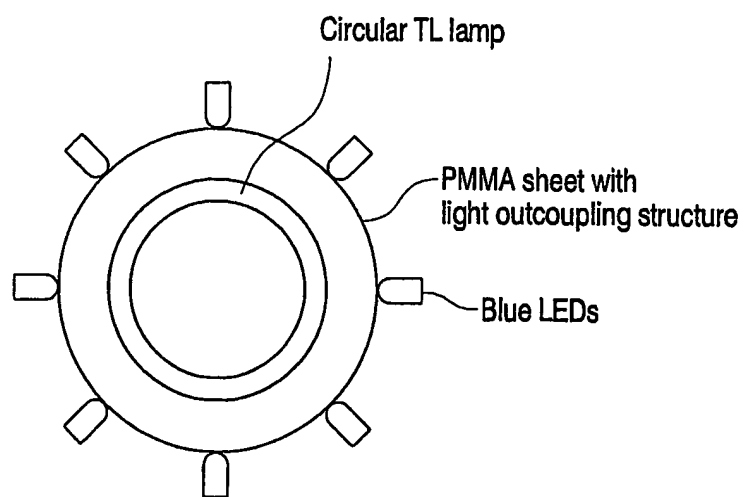


FIG. 2

3/4

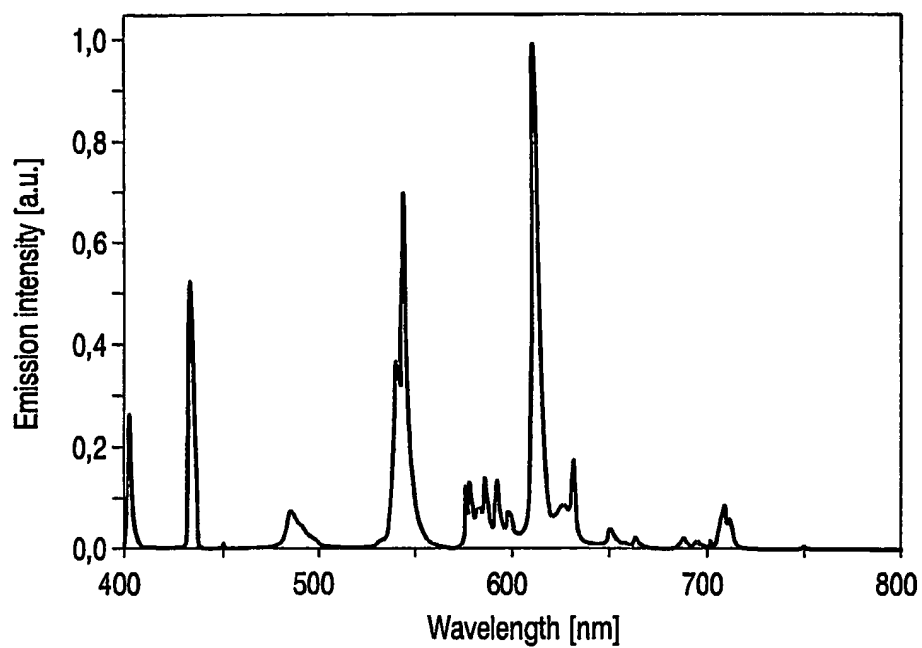


FIG. 3

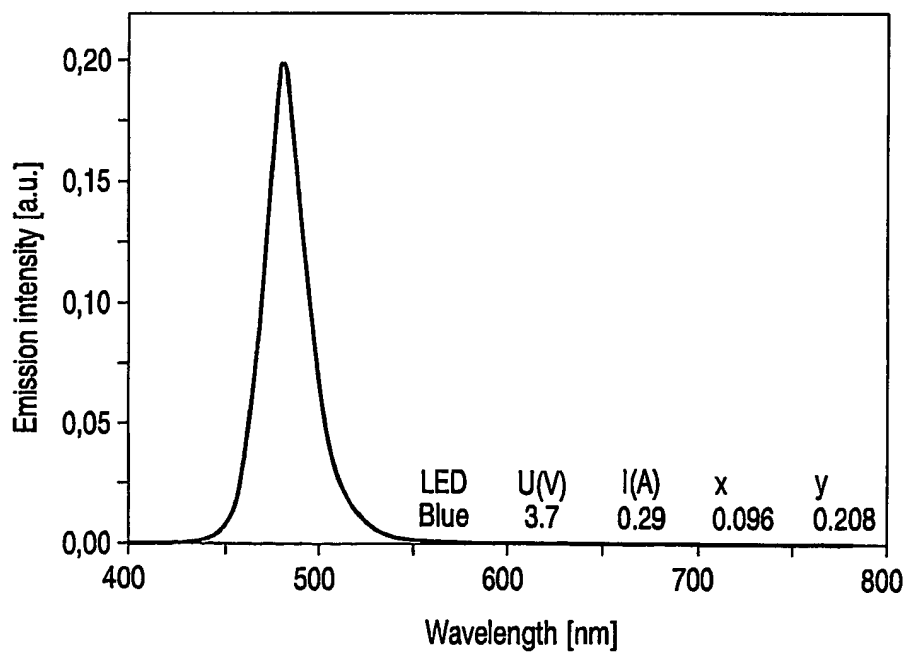


FIG. 4

4/4

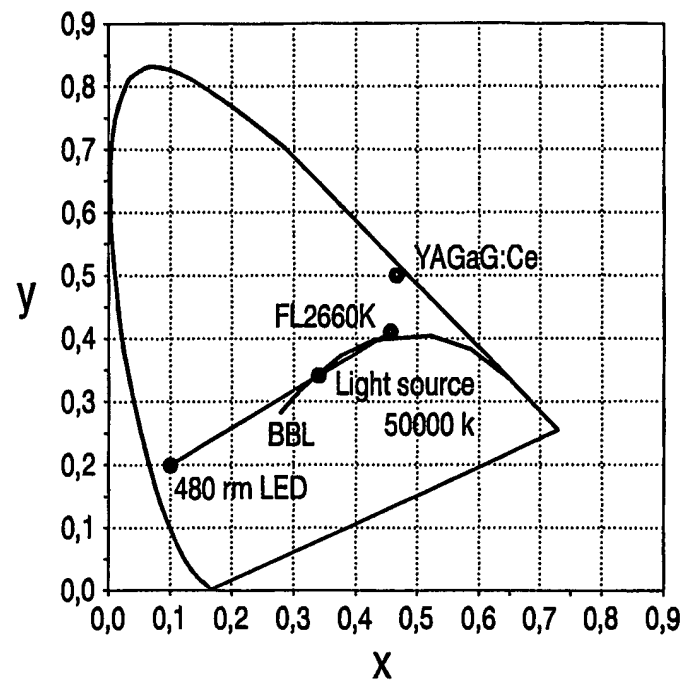


FIG. 5

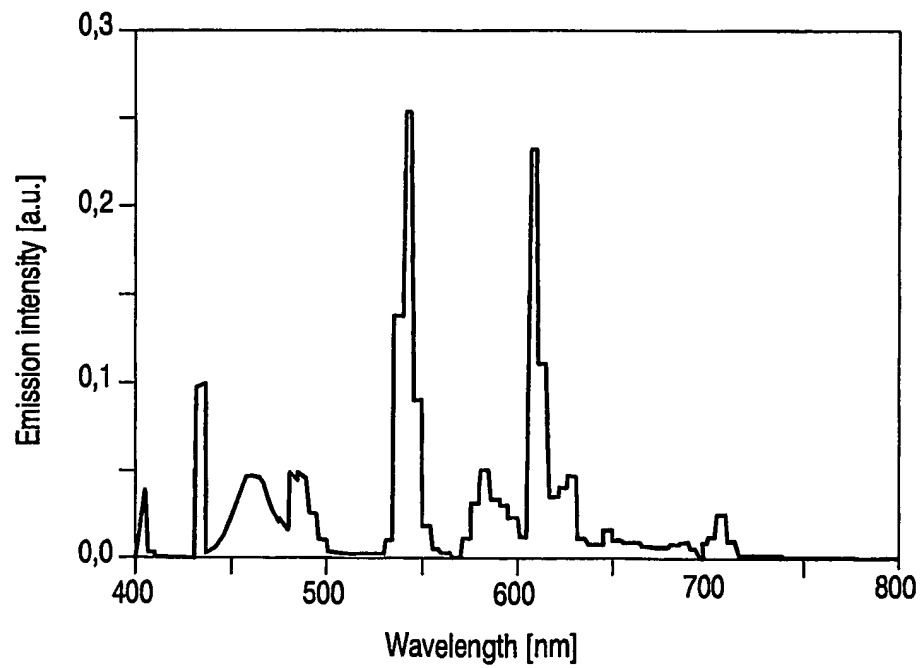


FIG. 6

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01J61/96 H05B35/00 H01J61/72 H01J61/

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01J H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 200 07 134 U (PATRA PATENT TREUHAND) 17 August 2000 (2000-08-17) page 2, line 21 - page 3, line 2 page 4, line 7 - line 11; figures 1-3	1-4, 6, 8
A	US 6 400 097 B1 (JIN FENG ET AL) 4 June 2002 (2002-06-04) column 3, line 1 - line 32	1, 5
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 01, 29 January 1999 (1999-01-29) -& JP 10 275600 A (MATSUSHITA ELECTRIC IND CO LTD), 13 October 1998 (1998-10-13) cited in the application abstract	1-8
	----- -/-	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

24 March 2004

Date of mailing of the international search report

31/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Zuccatti, S

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 02/062106 A (KONINKL PHILIPS ELECTRONICS NV) 8 August 2002 (2002-08-08) abstract	1,4
A	----- NAKAMURA S ED - INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS: "HIGH-POWER INGAN/ALGAN DOUBLE-HETEROSTRUCTURE BLUE-LIGHT-EMITTING DIODES" TECHNICAL DIGEST OF THE INTERNATIONAL ELECTRON DEVICES MEETING. SAN FRANCISCO, DEC. 11 - 14, 1994, NEW YORK, IEEE, US, vol. MEETING 40, 22 October 1995 (1995-10-22), pages 567-570, XP000585557 ISBN: 0-7803-2112-X the whole document -----	1-3



Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 20007134	U	17-08-2000	DE 20007134 U1	17-08-2000
US 6400097	B1	04-06-2002	EP 1304721 A1	23-04-2003
			JP 2003162975 A	06-06-2003
JP 10275600	A	13-10-1998	NONE	
WO 02062106	A	08-08-2002	CN 1457622 T	19-11-2003
			EP 1360877 A1	12-11-2003
			WO 02062106 A1	08-08-2002
			US 2002118538 A1	29-08-2002